

Fresh Air Processing Unit

1	Specifications	4
2	Dimensions.....	7
3	Unit Placement	9
4	Piping Diagram	10
5	Wiring Diagrams	11
6	Fan Performance	12
7	Capacity Tables	13
8	Electrical Characteristics	18
9	Sound Levels.....	19

1 Specifications

MIH200FAHN18 / MIH224FAHN18/ MIH252FAHN18

Table 1.1: MIH200(224, 252)FAHN18 specifications

Model name			MIH200FAHN18	MIH224FAHN18	MIH252FAHN18
Power supply			1-phase, 220-240V, 50/60Hz		
Cooling ¹	Capacity	kW	20.0	22.4	25.2
	Input	W	425	425	480
Heating ²	Capacity	kW	12.0	13.7	16.0
	Input	W	425	425	480
Fan motor	Model		ZKSN-920-8-12-3L	ZKSN-920-8-12-3L	ZKSN-920-8-12-3L
	Type		DC		
	Brand		NIDEC		
	Speed (H/M/L)	r/min	640/610/580/550/520/490/460	640/610/580/550/520/490/460	640/610/580/550/520/490/460
Coil	Number of rows		3	3	3
	Tube pitch × row pitch	mm	18×10.72	18×10.72	18×10.72
	Fin spacing	mm	1.35	1.35	1.35
	Fin type		Hydrophilic aluminum		
	Tube OD and type	mm	Φ5Inner groove		
	Dimensions (L×H ×W)	mm	1050×32.16×504	1050×32.16×504	1050×32.16×504
	Number of circuits		14	14	14
Airflow rate ³		m ³ /h	2500/2417/2333/2250/2167/2083/2000	2500/2417/2333/2250/2167/2083/2000	2800/2667/2533/2400/2267/2133/2000
External static pressure ⁴		Pa	220 (0-400)		
Sound pressure level ⁵		dB(A)	47/46/46/45/44/43/42	47/46/46/45/44/43/42	48/47/47/46/45/44/43
Sound power level		dB(A)	70/69/68/67/66/65/64	70/69/68/67/66/65/64	71/70/69/68/66/65/63
Unit	Net dimensions ⁶ (W×H×D)	mm	1300×550×900		
	Packed dimensions (W×H×D)	mm	1530×730×1060		
	Net/Gross weight	kg	117/142	117/142	117/142
Refrigerant type			R410A/R32		
Throttle		Type	Electronic expansion valve		
		Model	D32MISZ-1R		
Design pressure (H/L)		MPa	4.4/2.6		
Refriger	Liquid/Gas side	mm	Φ9.52/Φ19.1		Φ12.7/Φ22.2
Drain piping		mm	OD Φ32		

Notes:

- Indoor temperature 33°C DB, 28°C WB; outdoor temperature 33°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 0°C DB; outdoor temperature 0°C DB, -2.9°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Fan motor speed and air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
- Stable operation external static pressure range. (Note: setting external static pressure outside the unit's optimal static pressure range may lead to higher noise levels and lower airflow rate. For the optimal external static pressure range refer to the unit's installation manual.)
- Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- All specifications are measured at standard external static pressure.
- When fresh air processing units are installed together with standard indoor units, the total capacity of the fresh air processing units must not exceed 30% of the total capacity of the outdoor units and the total combination ratio must not exceed 100%.
- When there are only fresh air processing units in the system, the combination ratio is 50-100%.

MIH280FAHN18 / MIH335FAHN18/ MIH400FAHN18

Table 1.2: MIH280(335, 400)FAHN18 specifications

Model name			MIH280FAHN18	MIH335FAHN18	MIH400FAHN18	
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	28.0	33.5	40.0	
	Input	W	540	550	900	
Heating ²	Capacity	kW	18.0	22.0	26.5	
	Input	W	540	550	900	
Fan motor	Model		ZKSN-920-8-12-3L	ZKSN-920-8-12-3L	ZKSN-2300-8-2	
	Type		DC			
	Brand		NIDEC		Shangqi	
	Speed (H/M/L)	r/min	640/610/580/550/520/490/460	700/665/630/595/560/525/490	1040/985/930/875/820/765/710	
Coil	Number of rows		3	4	3	
	Tube pitch × row pitch	mm	18×10.72	18×10.72	18×10.72	
	Fin spacing	mm	1.35	1.35	1.35	
	Fin type		Hydrophilic aluminum			
	Tube OD and type	mm	Φ5Inner groove			
	Dimensions (L×H ×W)	mm	1050×32.16×504	1050×42.88×504	1600×32.16×504	
	Number of circuits		14	14	14	
Airflow rate ³		m ³ /h	3000/2833/2667/2500/2333/2167/2000	3200/3000/2800/2600/2400/2200/2000	4500/4217/3933/3650/3367/3083/2800	
External static pressure ⁴		Pa	220（0-400）		300（0-400）	
Sound pressure level ⁵		dB(A)	49/48/48/47/46/45/44	51/50/49/48/47/46/45	53/52/52/51/50/49/48	
Sound power level		dB(A)	72/71/69/68/66/64/63	74/73/71/69/67/65/63	76/75/73/72/70/68/65	
Unit	Net dimensions ⁶ (W×H×D)		mm	1300×550×900		1850×550×900
	Packed dimensions (W×H×D)		mm	1530×730×1060		2080×730×1060
	Net/Gross weight		kg	117/142	121/146	161/198
Refrigerant type			R410A/R32			
Throttle		Type	Electronic expansion valve			
		Model	D32MISZ-1R		DPF(TS2)4.5C-02	
Design pressure (H/L)		MPa	4.4/2.6			
Refriger	Liquid/Gas side	mm	Φ12.7/Φ22.2	Φ12.7/Φ25.4		
Drain piping		mm	OD Φ32			

Notes:

- Indoor temperature 33°C DB, 28°C WB; outdoor temperature 33°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 0°C DB; outdoor temperature 0°C DB, -2.9°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Fan motor speed and air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
- Stable operation external static pressure range. (Note: setting external static pressure outside the unit's optimal static pressure range may lead to higher noise levels and lower airflow rate. For the optimal external static pressure range refer to the unit's installation manual.)
- Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- All specifications are measured at standard external static pressure.
- When fresh air processing units are installed together with standard indoor units, the total capacity of the fresh air processing units must not exceed 30% of the total capacity of the outdoor units and the total combination ratio must not exceed 100%.
- When there are only fresh air processing units in the system, the combination ratio is 50-100%.

V8 VRF Indoor Units



MIH450FAHN18 / MIH560FAHN18

Table 1.3: MIH450(560)FAHN18 specifications

Model name			MIH450FAHN18	MIH560FAHN18
Power supply			1-phase, 220-240V, 50/60Hz	
Cooling ¹	Capacity	kW	45.0	56.0
	Input	W	900	1300
Heating ²	Capacity	kW	27.8	39.0
	Input	W	900	1300
Fan motor	Model		ZKSN-2300-8-2	ZKSN-2300-8-2
	Type		DC	
	Brand		Shangqi	
	Speed (H/M/L)	r/min	1040/985/930/875/820/765/ 710	1175/1115/1055/995/935/87 5/815
Coil	Number of rows		3	4
	Tube pitch × row pitch	mm	18×10.72	18×10.72
	Fin spacing	mm	1.35	1.35
	Fin type		Hydrophilic aluminum	
	Tube OD and type	mm	Φ5Inner groove	
	Dimensions (L×H ×W)	mm	1600×32.16×504	1600×42.88×504
	Number of circuits		14	14
Airflow rate ³		m ³ /h	4500/4217/3933/3650/3367 /3083/2800	6200/5833/5467/5100/4733/ 4367/4000
External static pressure ⁴		Pa	300 (0-400)	
Sound pressure level ⁵		dB(A)	53/52/52/51/50/49/48	56/55/55/54/53/52/51
Sound power level		dB(A)	76/75/73/72/70/68/65	78/77/76/74/73/71/69
Unit	Net dimensions ⁶ (W×H×D)	mm	1850×550×900	
	Packed dimensions (W×H×D)	mm	2080×730×1060	
	Net/Gross weight	kg	161/198	164/201
Refrigerant type			R410A/R32	
Throttle	Type		Electronic expansion valve	
	Model		DPF(TS2)4.5C-02	
Design pressure (H/L)		MPa	4.4/2.6	
Refrigerant piping	Liquid/Gas side	mm	Φ16/Φ28.6	
Drain piping		mm	OD Φ32	

Notes:


- Indoor temperature 33°C DB, 28°C WB; outdoor temperature 33°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 0°C DB; outdoor temperature 0°C DB, -2.9°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Fan motor speed and air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
- Stable operation external static pressure range. (Note: setting external static pressure outside the unit's optimal static pressure range may lead to higher noise levels and lower airflow rate. For the optimal external static pressure range refer to the unit's installation manual.)
- Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- All specifications are measured at standard external static pressure.
- When fresh air processing units are installed together with standard indoor units, the total capacity of the fresh air processing units must not exceed 30% of the total capacity of the outdoor units and the total combination ratio must not exceed 100%.
- When there are only fresh air processing units in the system, the combination ratio is 50-100%.

2 Dimensions

2.1 Unit Dimensions

MIH200FAHN18 / MIH224FAHN18/ MIH252FAHN18/ MIH280FAHN18 / MIH335FAHN18


Figure 2.1: MIH200(224, 252, 280, 335)FAHN18 dimensions (unit: mm)

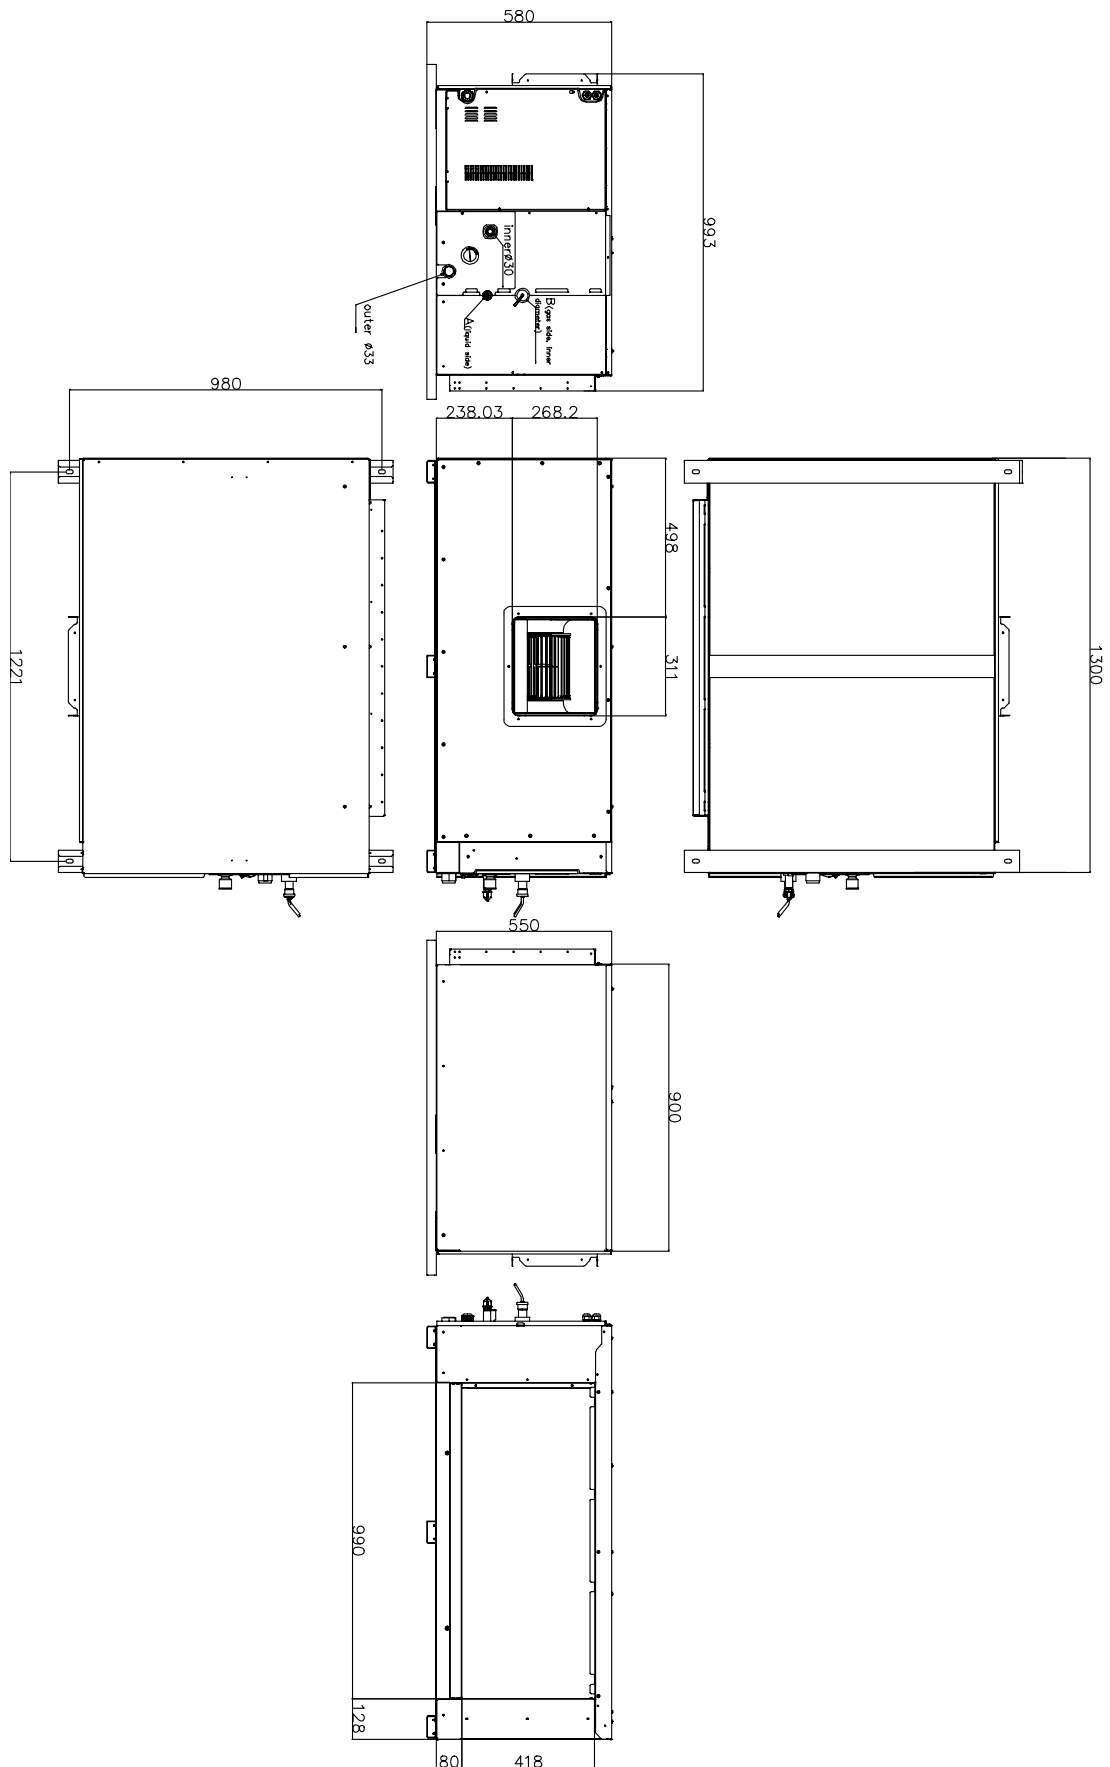

V8 VRF Indoor Units

MIH400FAHN18 MIH450FAHN18 / MIH560FAHN18

Figure 2.1: MIH400(450, 560)FAHN18 dimensions (unit: mm)

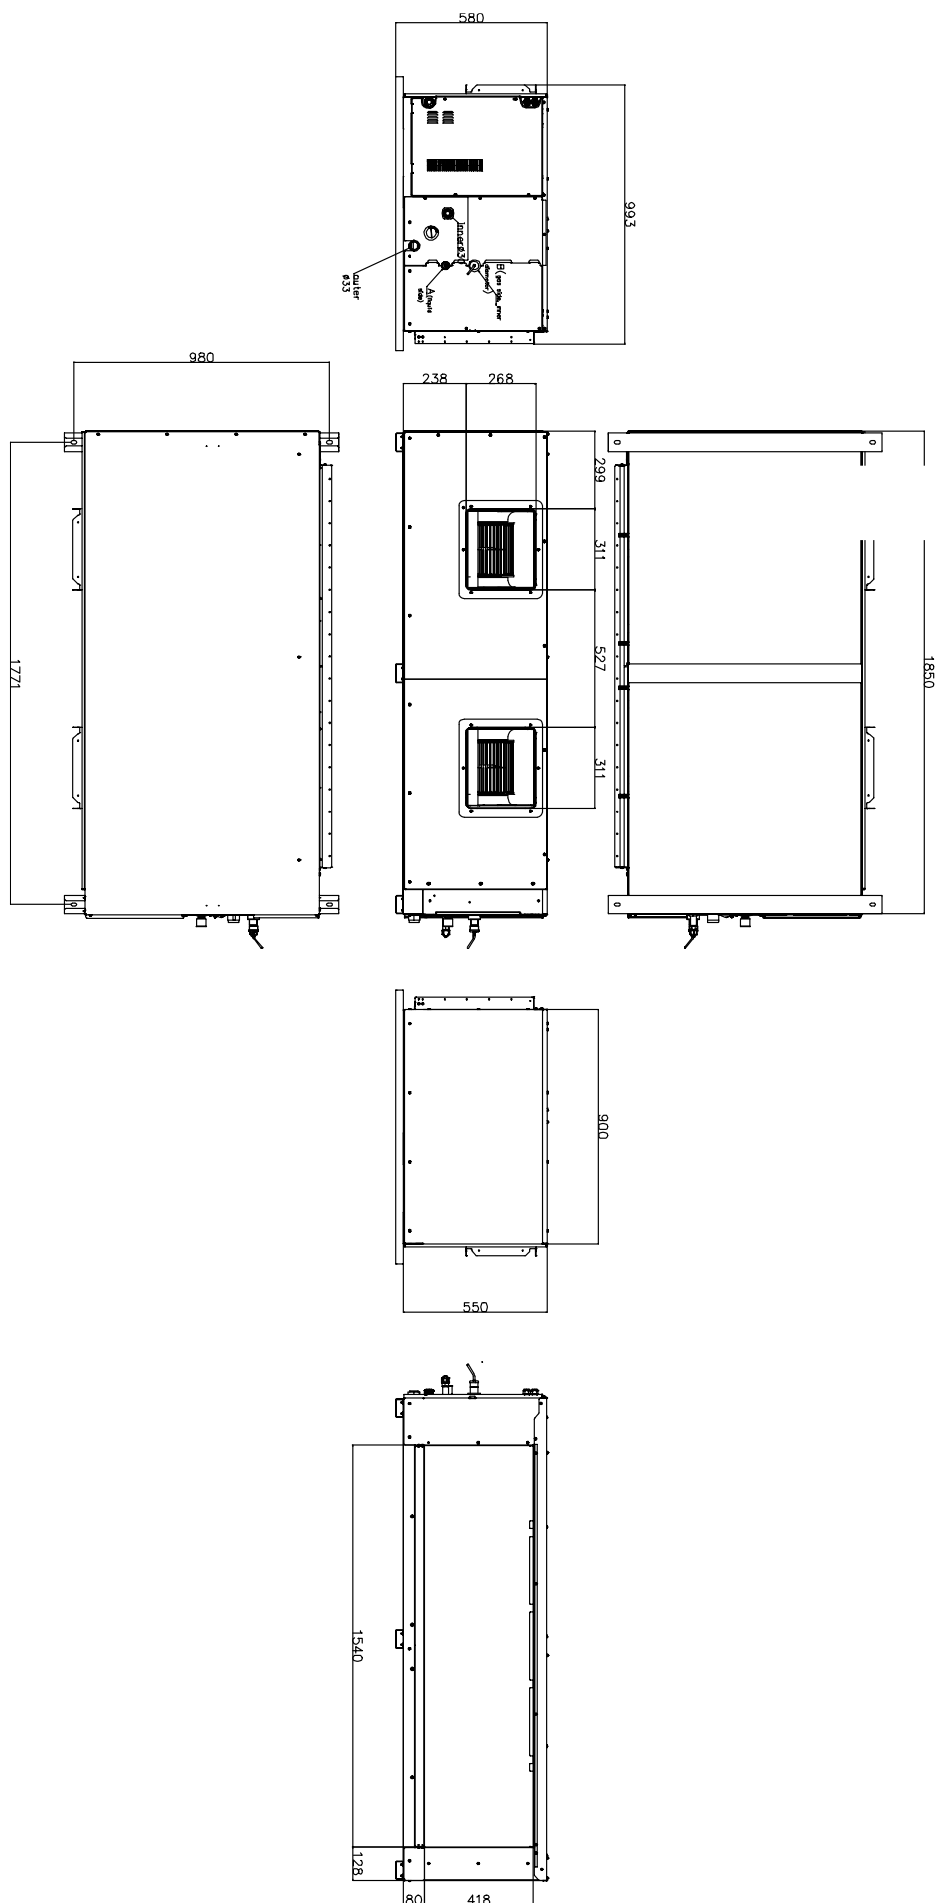

3 Unit Placement


3.1 Placement Considerations

Unit placement should take account of the following considerations:

- Units should not be installed in the following locations:
 - Where exposure to direct radiation from a high-temperature heat source or to interference from a source of electromagnetic radiation may occur.
 - Where dust or dirt may affect heat exchangers.
 - Where exposure to oil or to corrosive or harmful gases, such as acidic or alkaline gases, may occur.
 - Where exposure to salinity may occur, such as seaside locations.
 - Where highly flammable materials are present.
 - Where exposure to oily air may occur, such as a kitchen.
 - Where exposure to very high humidity may occur, such as a laundry.
- Units should be installed in positions where:
 - The ceiling is horizontal and is able to bear the unit's weight.
 - There are no obstructions that could impede the airflow into and out of the unit.
 - The airflow out of the unit can reach throughout the room.
 - There is sufficient space for access during installation, servicing and maintenance.
 - The refrigerant piping and drain piping can be easily connected to the refrigerant piping and drain piping systems.
 - Short-circuit ventilation (where outlet air returns quickly to a unit's air inlet) will not occur.

3.2 Space Requirements

Figure 3.1: Fresh Air Processing Unit space requirements (unit: mm)

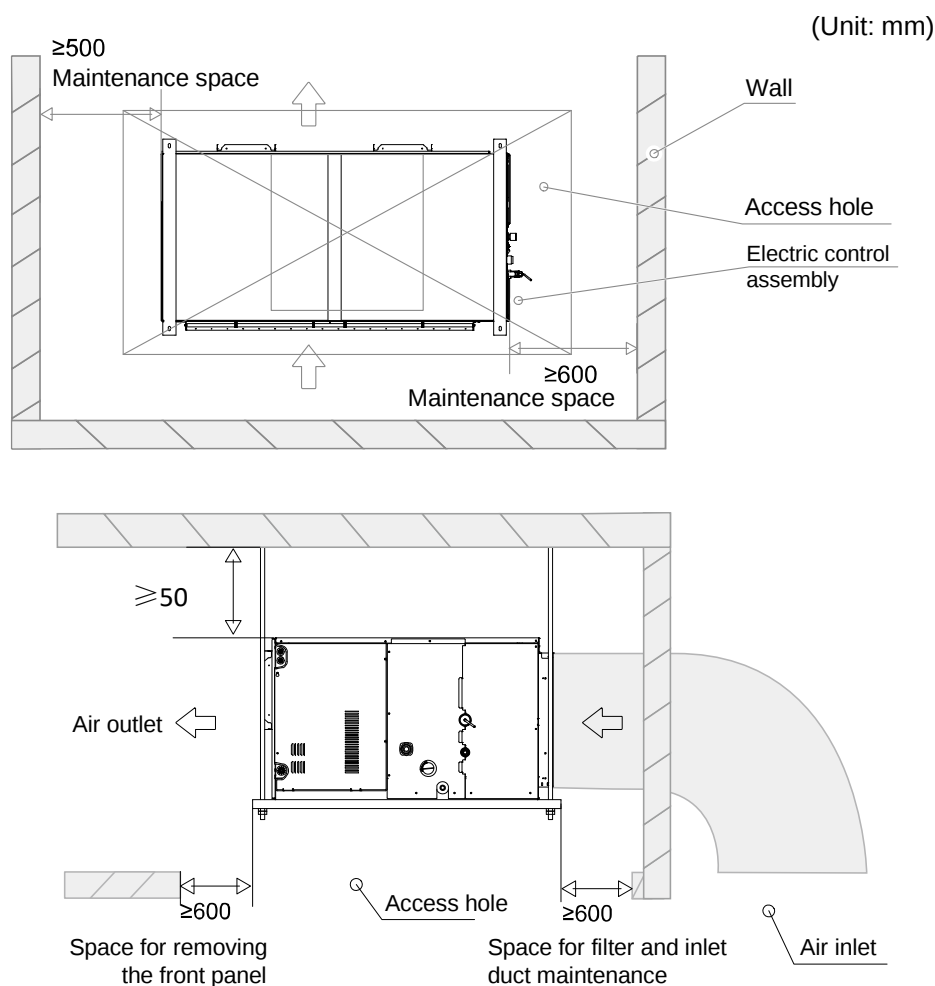


V8 VRF Indoor Units



4 Piping Diagram

MIH200FAHN18 / MIH224FAHN18/ MIH252FAHN18/ MIH280FAHN18 /
 MIH335FAHN18/ MIH400FAHN18 MIH450FAHN18 / MIH560FAHN18


Figure 4.1: MIH200(224, 252, 280, 335, 400, 450, 560)FAHN18 piping diagram

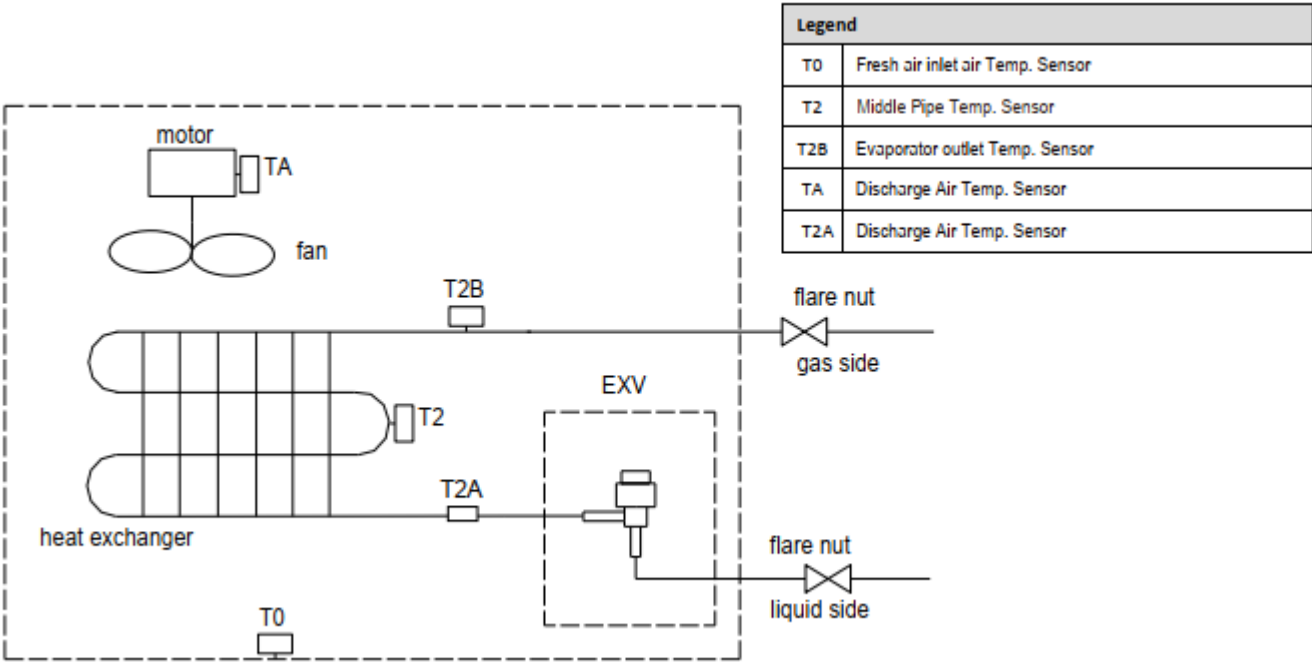

5 Wiring Diagrams

MIH200FAHN18 / MIH224FAHN18/ MIH252FAHN18/ MIH280FAHN18 /
MIH335FAHN18/ MIH400FAHN18 MIH450FAHN18 / MIH560FAHN18

Figure 5.1: MIH200(224, 252, 280, 335, 400, 450, 560)FAHN18 wiring diagram

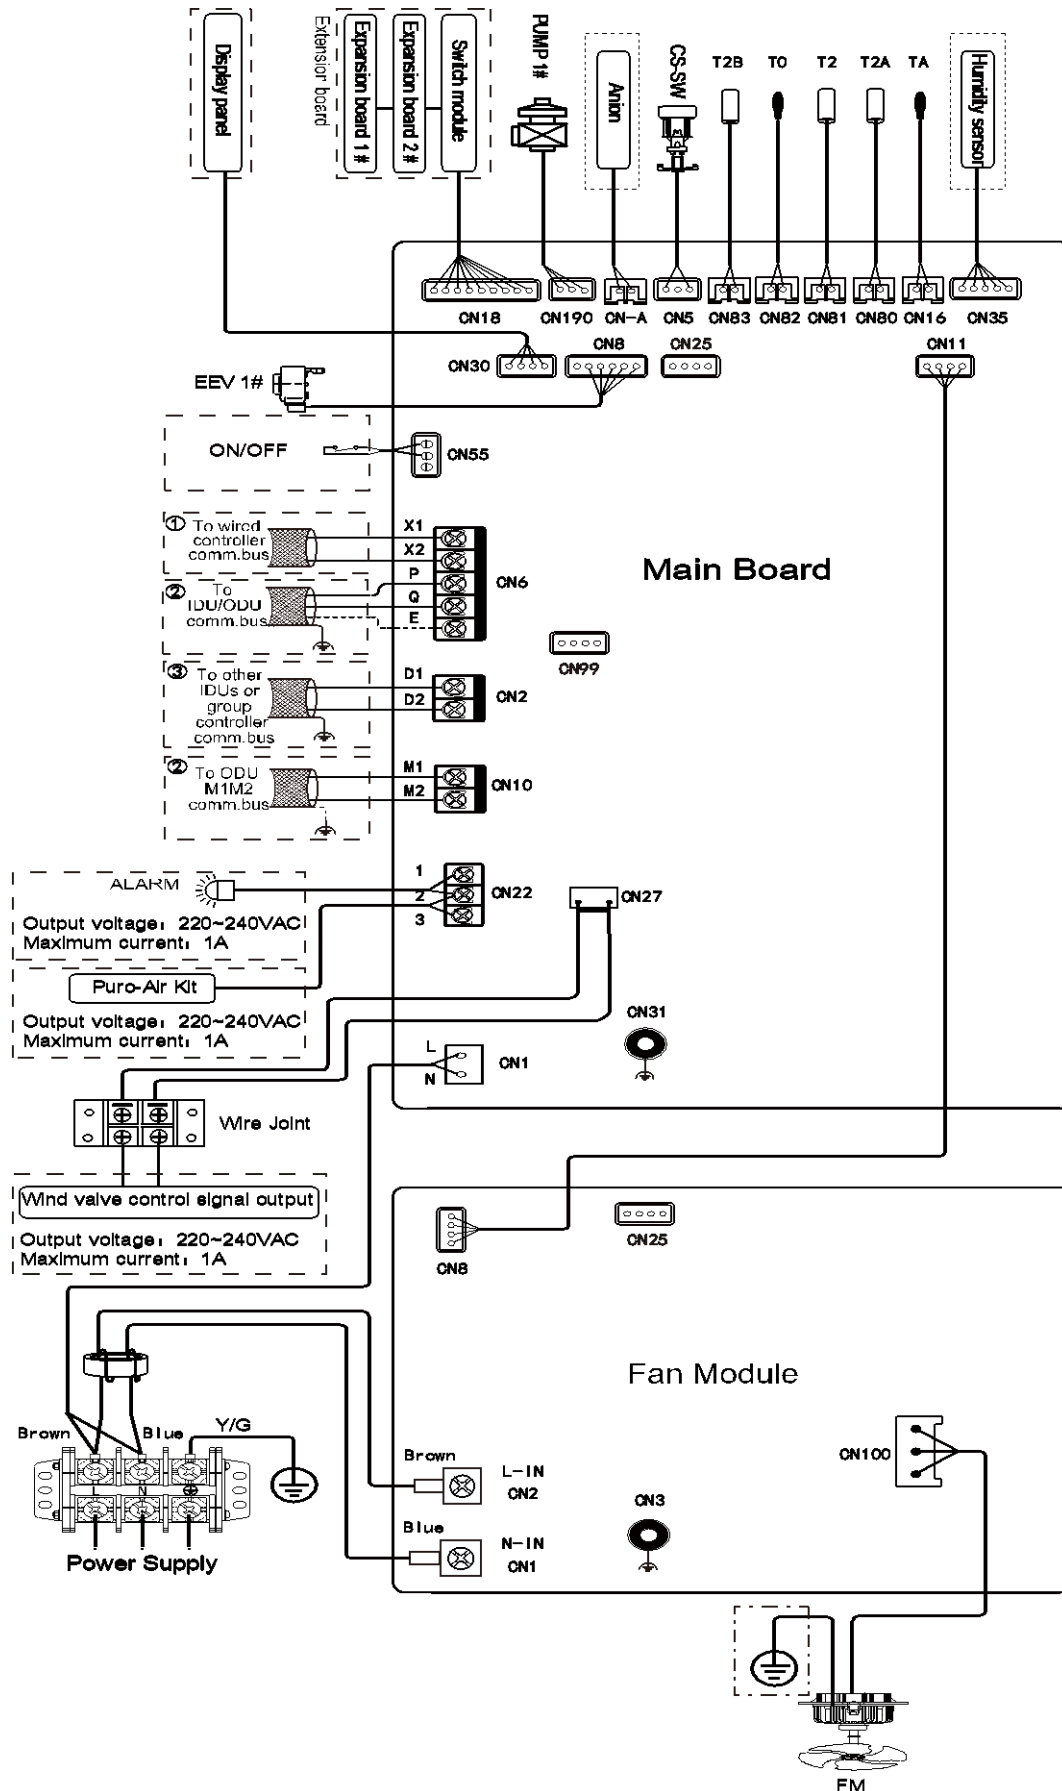

V8 VRF Indoor Units

6 Fan Performance

Figure 6.1: MIH200(224)FAHN18 fan performance

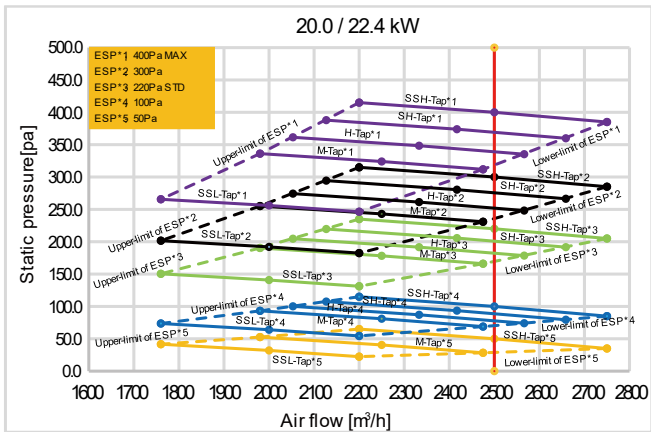


Figure 6.2: MIH252FAHN18 fan performance

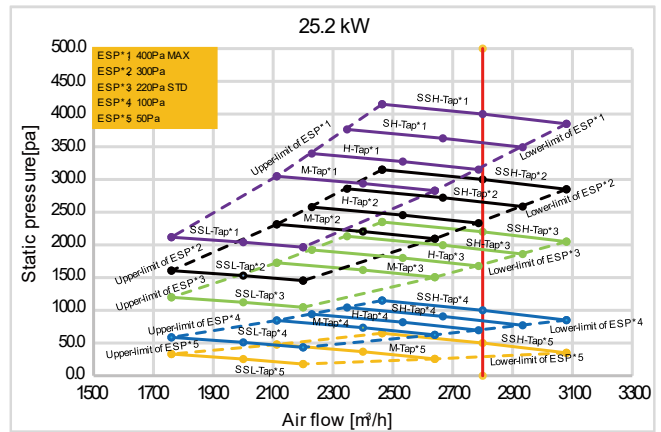


Figure 6.3: MIH280FAHN18 fan performance

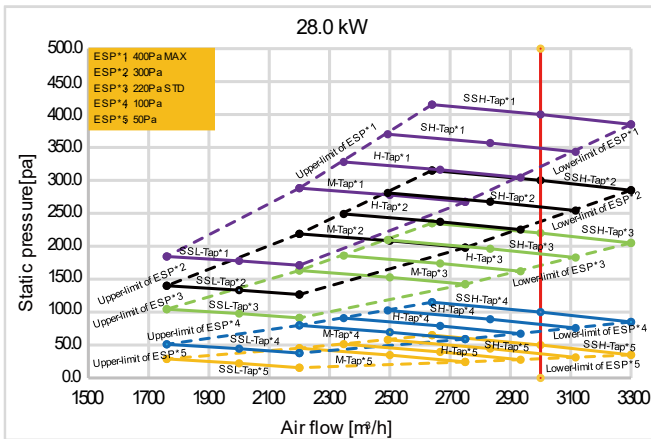


Figure 6.4: MIH335FAHN18 fan performance

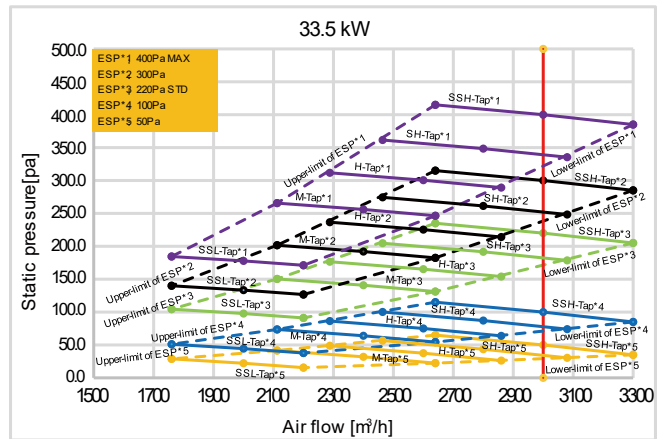


Figure 6.5: MIH400(450)FAHN18 fan performance

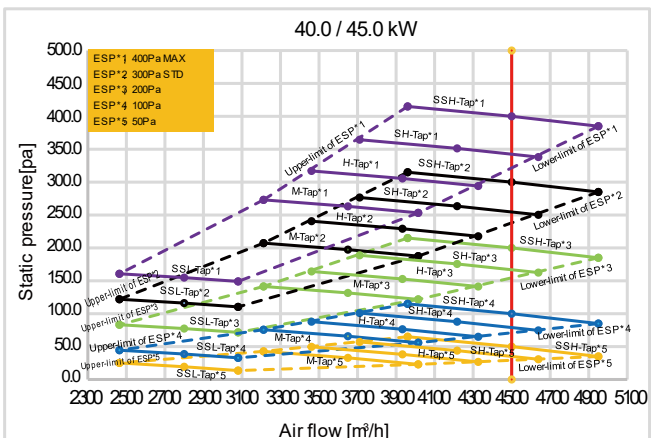


Figure 6.6: MIH560FAHN18 fan performance

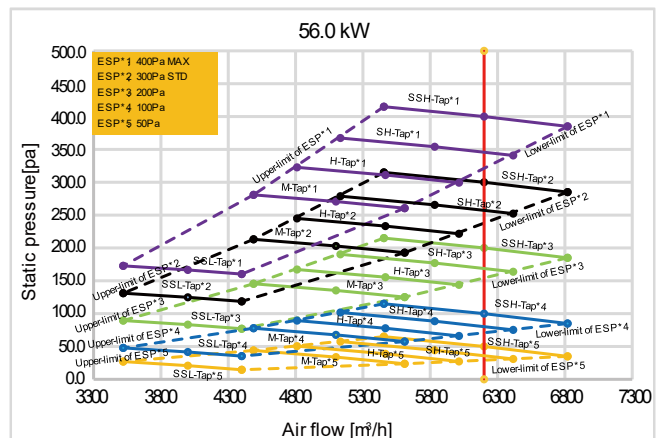


Table 6.7: Static pressure setting parameter table

Capacity	00	01	02	03	04	05	06	07	08	09
20.0-56.0kW	0Pa	10Pa	20Pa	30Pa	40Pa	50Pa	60Pa	70Pa	80Pa	90Pa
Capacity	10	11	12	13	14	15	16	17	18	19
20.0-56.0kW	100Pa	120Pa	140Pa	170Pa	200Pa	240Pa	280Pa	300Pa	360Pa	400Pa

7 Capacity Tables

7.1 Cooling Capacity Table

Table 7.1: Fresh Air Processing Unit cooling capacity

Capacity (kW)	Outdoor air temperature (°C DB)	Outdoor air temperature (°C WB)								
		15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0	35
		TC	TC	TC	TC	TC	TC	TC	TC	TC
		kW	kW	kW	kW	kW	kW	kW	kW	kW
20.0	20	7.6	10.1							
	22	7.5	10.1	14.2						
	25	7.3	10.1	14.1						
	27		10.1	14.0	16.5					
	29			14.0	16.4	19.3				
	31			13.9	16.3	19.1	20.2			
	33			13.9	16.2	19.0	20.0	22.1		
	35				16.1	18.9	19.9	21.9	23.6	
	37				16.1	18.8	19.1	19.5	23.5	27.5
	39					16.8	17.3	19.4	20.9	27.4
	41					16.7	16.7	16.7	20.8	27.3
	43					16.6	16.6	16.7	20.6	27.1
22.4	20	8.5	11.3							
	22	8.4	11.3	15.9						
	25	8.2	11.3	15.8						
	27		11.3	15.7	18.4					
	29			15.6	18.3	21.6				
	31			15.6	18.2	21.4	22.6			
	33			15.5	18.1	21.3	22.4	24.7		
	35				18.1	21.2	22.3	24.6	26.5	
	37				18.0	21.1	21.4	21.8	26.3	30.8
	39					18.8	19.4	21.7	23.4	30.7
	41					18.7	18.7	18.8	23.2	30.5
	43					18.6	18.6	18.7	23.1	30.4
25.2	20	9.7	12.9							
	22	9.8	12.9	18.0						
	25	9.5	12.9	17.8						
	27		12.8	17.7	20.8					
	29			17.7	20.7	24.3				
	31			17.6	20.6	24.1	25.4			
	33			17.5	20.5	24.0	25.2	27.7		
	35				20.4	23.9	25.1	27.6	29.7	
	37				20.3	23.8	24.1	24.5	29.5	34.6
	39					21.2	21.9	24.4	26.3	34.4
	41					21.1	21.1	21.1	26.1	34.2
	43					21.0	21.0	21.1	26.0	34.0

Abbreviations:
TC: Total capacity

Notes:

1. Shaded cells indicate rating condition.

Table continued on next page ...

V8 VRF Indoor Units



Table 7.2: Fresh Air Processing Unit cooling capacity

Capacity (kW)	Outdoor air temperature (°C DB)	Outdoor air temperature (°C WB)								
		15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0	35
		TC	TC	TC	TC	TC	TC	TC	TC	TC
		kW	kW	kW	kW	kW	kW	kW	kW	kW
28.0	20	10.8	14.4							
	22	10.8	14.4	20.0						
	25	10.7	14.4	19.8						
	27		14.4	19.7	23.1					
	29			19.7	23.0	27.0				
	31			19.6	22.9	26.8	28.5			
	33			19.5	22.8	26.7	28.0	30.8		
	35				22.7	26.5	27.9	30.6	32.9	
	37				22.6	26.4	26.9	27.2	32.8	38.3
	39					23.5	24.3	27.1	29.1	38.1
	41					23.4	23.4	23.5	29.0	37.9
	43					23.4	23.4	23.4	28.9	37.7
33.5	20	13.3	17.3							
	22	13.2	17.3	23.9						
	25	13.1	17.3	23.7						
	27		17.3	23.7	27.7					
	29			23.5	27.5	32.4				
	31			23.4	27.4	32.2	33.6			
	33			23.4	27.3	32.0	33.5	37.0		
	35				27.2	31.8	33.3	36.8	39.6	
	37				27.0	31.7	32.0	32.6	39.4	46.2
	39					28.1	29.1	32.4	34.9	46.1
	41					28.0	28.1	28.1	34.7	45.8
	43					27.9	28.0	28.0	34.6	45.6
40.0	20	16.3	21.0							
	22	16.3	20.9	28.7						
	25	16.2	20.9	28.4						
	27		20.8	28.3	33.1					
	29			28.2	32.9	38.6				
	31			28.1	32.7	38.4	40.1			
	33			28.0	32.6	38.2	40.0	44.0		
	35				32.5	37.9	39.8	43.8	47.0	
	37				32.3	37.8	38.3	38.9	46.8	54.8
	39					33.6	34.7	38.6	41.5	54.5
	41					33.5	33.5	33.5	41.3	54.2
	43					33.4	33.4	33.4	41.1	54.0

Abbreviations:
TC: Total capacity

Notes:

1. Shaded cells indicate rating condition.

Table continued on next page ...

Table 7.3: Fresh Air Processing Unit cooling capacity

Capacity (kW)	Outdoor air temperature (°C DB)	Outdoor air temperature (°C WB)								
		15.0	17.0	20.0	23.0	26.0	28.0	30.0	32.0	35
		TC	TC	TC	TC	TC	TC	TC	TC	TC
		kW	kW	kW	kW	kW	kW	kW	kW	kW
45.0	20	18.3	23.6							
	22	18.3	23.5	32.3						
	25	18.2	23.5	32.0						
	27		23.4	31.8	37.2					
	29			31.7	37.0	43.4				
	31			31.6	36.8	43.2	45.1			
	33			31.5	36.7	42.9	45.0	49.5		
	35				36.5	42.7	44.8	49.2	52.9	
	37				36.4	42.5	43.1	43.7	52.6	61.6
	39					37.8	39.1	43.5	46.7	61.3
	41					37.7	37.7	37.7	46.5	61.0
	43					37.6	37.6	37.6	46.3	60.7
56.0	20	23.0	29.6							
	22	23.0	29.5	40.3						
	25	23.0	29.4	40.0						
	27		29.4	39.8	46.4					
	29			39.6	46.2	54.1				
	31			39.5	45.9	53.7	56.4			
	33			39.4	45.7	53.5	56.0	61.6		
	35				45.5	53.2	55.7	61.3	65.8	
	37				45.3	53.0	54.0	54.6	65.5	76.4
	39					47.2	49.0	54.3	58.4	76.1
	41					47.1	47.2	47.3	58.1	75.7
	43					46.9	47.0	47.1	57.8	75.3

Abbreviations:
TC: Total capacity

Notes:
1. Shaded cells indicate rating condition.

V8 VRF Indoor Units



7.2 Heating Capacity Table

Table 7.4: Fresh Air Processing Unit heating capacity

Capacity (kW)	Outdoor air temperature (°C DB)	Outdoor air temperature (°C WB)								
		-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
		TC	TC	TC	TC	TC	TC	TC	TC	TC
20.0	-5.0	13.6	13.6							
	0.0			12.0						
	3.0			10.3	10.3	9.9				
	7.0					8.2	8.2	8.2		
	11.0						7.1	7.1	7.1	
	16.0							4.9	4.9	4.9
22.4	-5.0	15.6	15.6							
	0.0			13.7						
	3.0			11.8	11.8	11.8				
	7.0					9.3	9.3	9.3		
	11.0						8.1	8.1	8.1	
	16.0							5.6	5.6	5.6
25.2	-5.0	18.2	18.2							
	0.0			16.0						
	3.0			13.8	13.8	13.8				
	7.0					10.9	10.9	10.9		
	11.0						9.5	9.5	9.5	
	16.0							6.5	6.5	6.5
28.0	-5.0	20.4	20.4							
	0.0			18.0						
	3.0			15.5	15.5	15.5				
	7.0					12.3	12.3	12.3		
	11.0						10.6	10.6	10.6	
	16.0							7.4	7.4	7.4
33.5	-5.0	25.0	25.0							
	0.0			22.0						
	3.0			19.0	19.0	19.0				
	7.0					15.0	15.0	15.0		
	11.0						13.0	13.0	13.0	
	16.0							9.0	9.0	9.0
40.0	-5.0	30.1	30.1							
	0.0			26.5						
	3.0			22.8	22.8	22.8				
	7.0					18.1	18.1	18.1		
	11.0						15.7	15.7	15.7	
	16.0							10.8	10.8	10.8
45.0	-5.0	31.6	31.6							
	0.0			27.8						
	3.0			24.0	24.0	24.0				
	7.0					19.0	19.0	19.0		
	11.0						16.4	16.4	16.4	
	16.0							11.4	11.4	11.4

Abbreviations:

TC: Total capacity

Notes:

Shaded cells indicate rating condition.

Table 7.5: Fresh Air Processing Unit heating capacity

Capacity (kW)	Outdoor air temperature (°C DB)	Outdoor air temperature (°C WB)								
		-7.0	-5.2	-2.9	0.0	2.0	4.0	6.0	10.0	14.0
		TC	TC	TC	TC	TC	TC	TC	TC	TC
		kW	kW	kW	kW	kW	kW	kW	kW	kW
56.0	-5.0	44.2	44.2							
	0.0			39.0						
	3.0			33.6	33.6	33.6				
	7.0					26.6	26.6	26.6		
	11.0						23.1	23.1	23.1	
	16.0							16.0	16.0	16.0

Abbreviations:

TC: Total capacity

Notes:

Shaded cells indicate rating condition.

V8 VRF Indoor Units



8 Electrical Characteristics

Table 8.1: Fresh Air Processing Unit electrical characteristics

Model name	Power supply						Indoor fan motors	
	Hz	Volts	Min. volts	Max. volts	MCA	MFA	Rated motor output (kW)	FLA
MIH200FAHN18	50/60	220-240	198	242	3.68	30	0.92	2.94
MIH224FAHN18	50/60	220-240	198	242	3.68	30	0.92	2.94
MIH252FAHN18	50/60	220-240	198	242	4.20	30	0.92	3.36
MIH280FAHN18	50/60	220-240	198	242	4.59	30	0.92	3.68
MIH335FAHN18	50/60	220-240	198	242	4.73	30	0.92	3.78
MIH400FAHN18	50/60	220-240	198	242	6.56	30	2.30	5.25
MIH450FAHN18	50/60	220-240	198	242	6.56	30	2.30	5.25
MIH560FAHN18	50/60	220-240	198	242	10.37	30	2.30	8.30

Abbreviations:

MCA: Minimum Circuit Amps

MFA: Maximum Fuse Amps

FLA: Full Load Amps

9 Sound Levels

9.1 Overall


Table 9.1: Fresh Air Processing Unit sound pressure levels

Model name	Sound pressure levels dB(A)						
	SSH	SH	H	M	L	SL	SSL
MIH200FAHN18	47	46	46	45	44	43	42
MIH224FAHN18	47	46	46	45	44	43	42
MIH252FAHN18	48	47	47	46	45	44	43
MIH280FAHN18	49	48	48	47	46	45	44
MIH335FAHN18	51	50	49	48	47	46	45
MIH400FAHN18	53	52	52	51	50	49	48
MIH450FAHN18	53	52	52	51	50	49	48
MIH560FAHN18	56	55	55	54	53	52	51

Notes:

1. Sound pressure levels are measured 1.4m below the unit in a semi-anechoic chamber. During in-situ operation, sound pressure levels may be higher as a result of ambient noise.

Figure 9.1: Fresh Air Processing Unit sound pressure level measurement

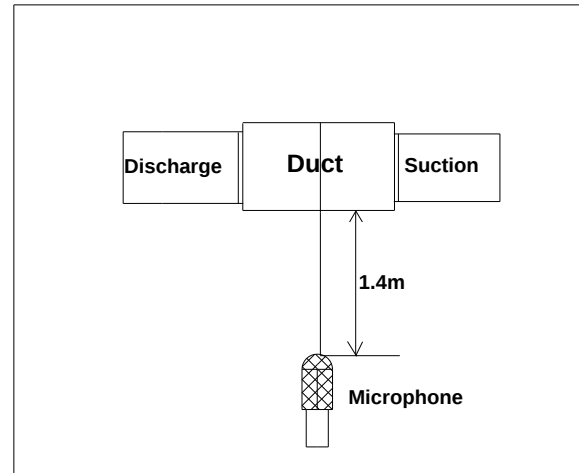

9.2 Octave Band Levels

Figure 9.2: MIH200(224)FAHN18 octave band levels

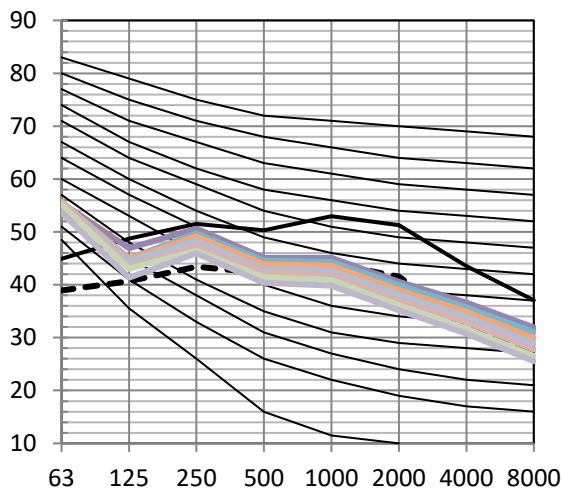


Figure 9.3: MIH252FAHN18 octave band levels

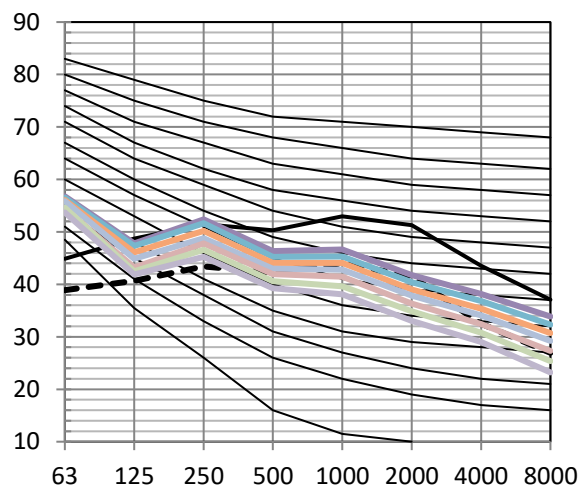


Figure 9.4: MIH280FAHN18 octave band levels


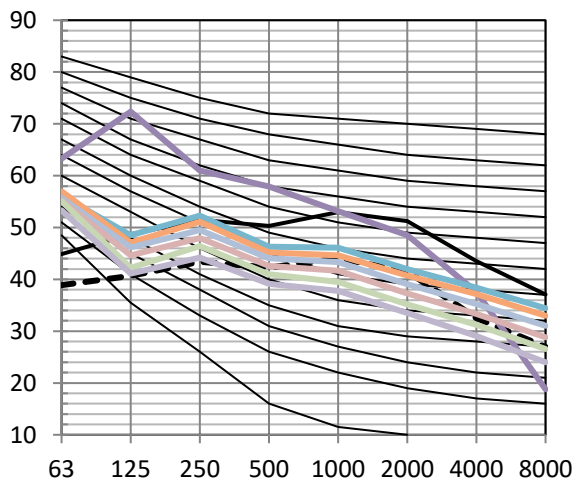


Figure 9.5: MIH335FAHN18 octave band levels

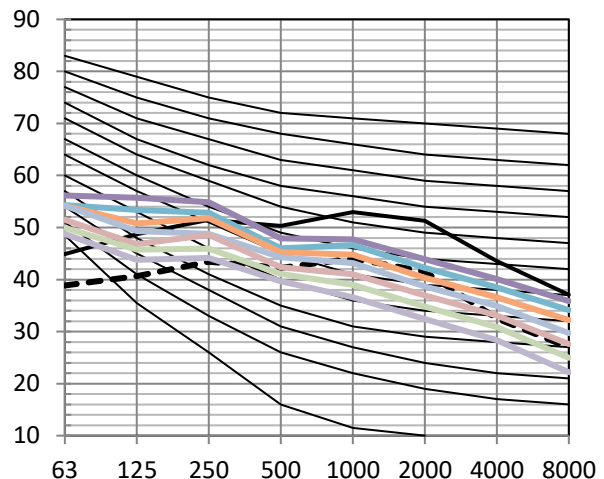

V8 VRF Indoor Units



Figure 9.6: MIH400(450)FAHN18 octave band levels

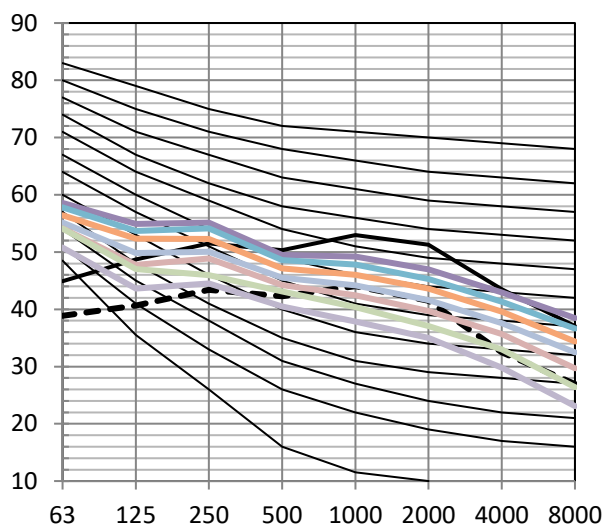


Figure 9.7: MIH560FAHN18 octave band levels

